


MOVING LASER SYSTEM FOR PATIENT ALIGNMENT IN RT

DESCRIPTION

Precise patient marking, accurate planning and exact positioning are key factors for a successful treatment. Patient marking takes place during CT simulation (virtual simulation) and is required for reproducible treatment positioning on the LINAC.

DORADOnova 3 laser system consists of three rails with fixed and movable laser modules for projecting red, green or blue lines to mark the patient in all three body planes

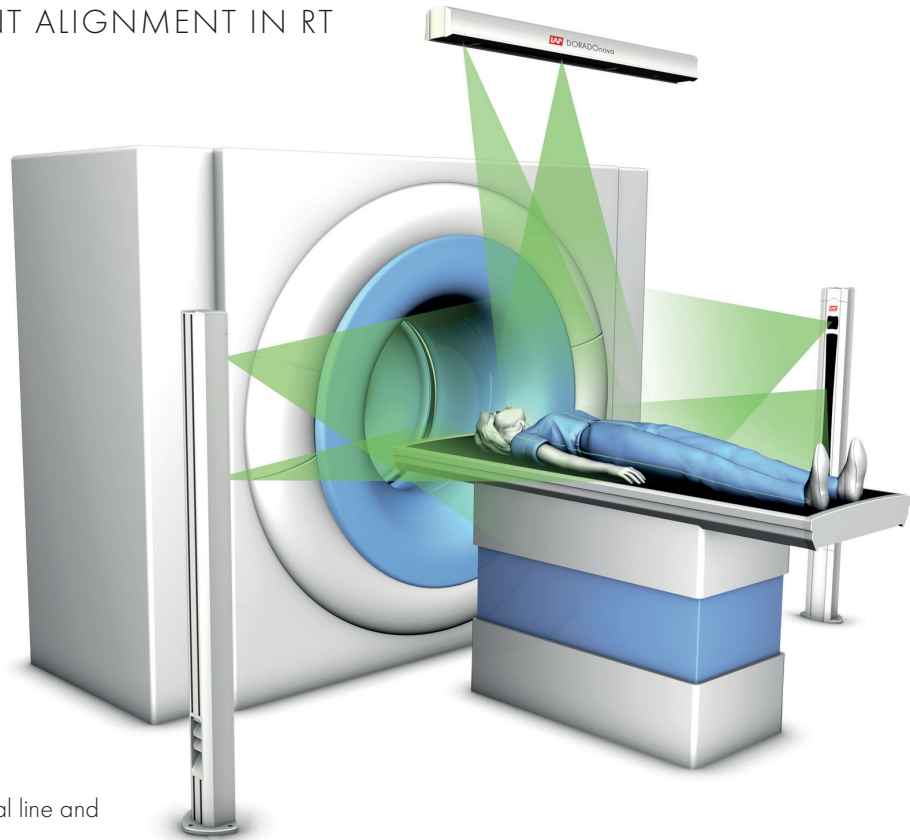

SCOPE OF DELIVERY

- 1 ceiling rail with one movable laser for display of sagittal line and one fixed laser for display of transverse line
- 2 wall/post rails, each with one movable laser to display the coronal lines and one fixed laser for display of transverse lines
- Remote control for laser adjustment
- Cable set consists of power cords and data cable
- Wilke Phantom for quality assurance



Laser Adjustment

All 6 degrees of freedom can be adjusted via remote control

- Shift, tilt, rotation
- Focus

MOUNTING VERSIONS

You are free to select from five mounting versions to perfectly match your existing room situation.



wall-ceiling-wall



wall-ceiling-post



post-ceiling-wall



post-ceiling-post



bridge

OPTIONS (SUBJECT TO COSTS)

- Support system for false ceilings
- Support system for floor mounted units
- Bridge design

NOTES

- 12 months standard warranty
- Installation not included

TECHNICAL DATA

SYSTEM		
Dimensions	wall (W x H x D)	1553 x 143 x 109.5 mm (61.1" x 5.6" x 4.3")
	ceiling (W x H x D)	1553 x 143 x 109.5 mm (61.1" x 5.6" x 4.3")
	post (W x H x D)	1707.5 x 225 x 164 mm (67.2" x 8.9" x 6.5")
	bridge (customized, W x H)	2594-5000 mm x 2300-2800 mm (102.1"-197" x 90.6"-110.2")
Weight	wall, ceiling	23 kg
	post	24 kg
	bridge	approx. 100 kg
International Protection Rating	IP20	
Operating temperature	15 ... 30°C	
Ambient conditions	35 ... 80 % rel. humidity, non-condensing	
Travel range	700 mm	
Travel speed	up to 200 mm/s	
Positioning accuracy	± 0.1 mm	
Projection precision	± 0.5 mm up to 4 m distance	
LASER		
Laser colour (typical wave length)	red (638 nm), green (520 nm), blue (450 nm)	
Laser class	2	
Focusable range	1 ... 4 m	
Line length at 3 m distance	> 3 m	
Line width up to 4 m distance	< 1 mm (red, green), < 0.5 mm (blue)	
Max. laser output power	< 1 mW	
POWER SUPPLY		
External power supply	100 ... 240 V AC, 50 ... 60 Hz	
Internal voltage	24 V DC	
REMOTE CONTROL		
Dimensions (H x W x D)	163 x 63 x 21 mm (6.4" x 2.5" x 0.8")	
Weight	130 g	
International Protection Rating	IP40	
Power supply	6 V DC (4 batteries type AAA/LG 03/Micro, 1.5 V)	



www.LAP-LASER.com

LAP GmbH
Laser Applikationen
 Zeppelinstrasse 23
 21337 Lueneburg
 Germany
 Phone +49 4131 9511-95
 Fax +49 4131 9511-96
 Email info@lap-laser.com

LAP DORADOnova is a registered trademark of LAP GmbH Laser Applikationen. Further designations of products or services may be registered trademarks of LAP GmbH or other organizations; their use by third parties may infringe the rights of the respective owners.



NL-Tec Pty Ltd
 Unit 10/16 Yampi Way
 Willetton, WA 6155
 Australia

Tel: +61 8 9259 5100
 e-mail: info@nl-tec.com
 www.nl-tec.com